# **Brake Calipers EV 028 EFM and EH 028 EFM**

## **RINGSPANN®**

## electromagnetically activated - spring released



| Features  | Code       |
|---|------------|
| Brake Caliper with electromagnet                                      | Е          |
| Mounting to the machine parallel or at right angles to the brake disc | V<br>H     |
| Frame size 028  | 028        |
| Electromagnetically activated   | Е          |
| Spring released   | F          |
| Manual adjustment to accommodate friction block wear                  | М          |
| Supply voltage 220 to 240 VAC<br>Supply voltage 380 to 480 VAC        | 240<br>480 |
| Electromagnet mounted in central position                             | M          |
| Thickness of brake disc 10 16 mm or 18 26 mm                          | 12<br>25   |

## **Example for ordering**


Brake Caliper EV 028 EFM, supply voltage 400 VAC, electromagnet mounted in central position, thickness of brake disc 15 mm:

### **Advantages**

The brake caliper EV 028 EFM or EH 028 EFM is a very compact and high efficient disc brake with very low power consumption. Its floating bearing compensates small misallignments of the brake disc. The attached electronic reduces the power consumption in closed position automatically.

#### **Options**

- Available with cCSAus approval
- Inductive proximity switch: "Brake released"-, "Brake closed"-status and/or "Friction block wear adjustment necessary"

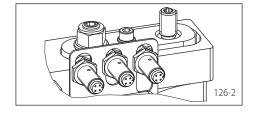

### **Technical Data**

|   | Brake Calipers<br>EV 028 EFM and EH 028 EFM<br>with supply voltage |                     |
|---|--|---------------------|
|   | 220 to 240 VAC   | 380 to 480 VAC      |
| Brake disc<br>diameter                            | Braking<br>torque  | Braking<br>torque   |
| mm  | Nm   | Nm                  |
| 300   | 1170   |                     |
| 355   | 1 450  |                     |
| 430   | 1820   |                     |
| 520   | 2270   |                     |
| 630   | 2820   |                     |
| 710   | 3 2 2 0  |                     |
| Clamping force                                    | 12 500 N   |                     |
| Clamping force or<br>braking torque<br>adjustable | 70 - 100%  |                     |
| Power consumption in closed position              | 15 W<br>(100% du   | 19 W<br>ity factor) |
| Fuse rating                                       | 10 A, Type "B"   |                     |
| Max. number of actuation                          | 360/h permanent activations at 20 °C ambient temperature           |                     |
| Actuation frequency*                              | at least 8 seconds<br>between 2 activations                        |                     |
| Weight  | 24 kg  |                     |

The braking torques shown in the table are based on a theoretical friction coefficient of 0,4.

EV 028 EFM - 480 M - 12


<sup>\*</sup> Shorter actuation frequency on request

# **Brake Calipers EV 028 EFM and EH 028 EFM**



electromagnetically activated - spring released

## **Brake Caliper EV 028 EFM**

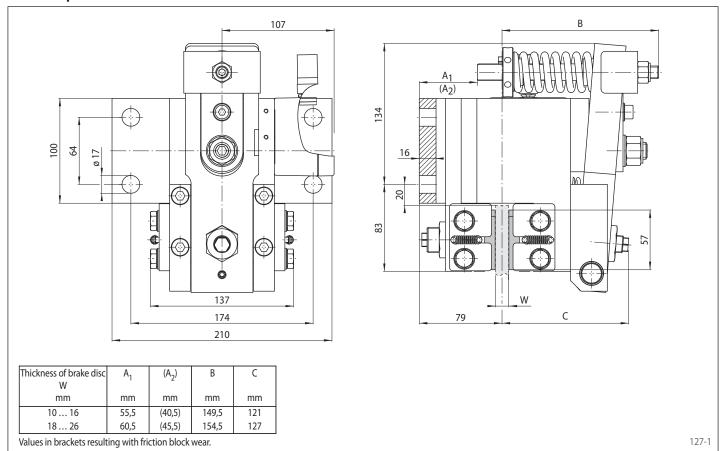

### **Brake Caliper EH 028 EFM**

